

phil.

Patchlist

Main hall

01-2026

Table of contents

Household information	3
Light consoles	3
Stage inventory	3
sACN 191 & 193 Moving Frontlight & Houselight	4
Front Plot	4
Stage light	5
LX0 – sACN 20	5
LX1 – sACN 21	5
LX2 – sACN 22	5
LX3 – sACN 23	6
Floor set – sACN 31	6
Stage Plot	7
Flybar list	8
House lights (separate)	9
Impression gallery	10

Household information

sACN

Guest Desk IP 172.21.39.71
Subnet 255.255.255.192
Gate way 172.21.39.126

House Desk 172.21.39.70

Light consoles

1x GrandMA3 Compact XT

1x RoadHog 4 (+Wing)

Stage inventory


Number	Brand	Type	Mode	Channel
Front / House light				
24	Selecon	Profile 1200w	Single Dim	1
8	JB Lighting	P12 Profile	Mode 2	63
6	Generic	Dimmer	Single Dim	1
Stage light				
12	JB Lighting	P9	Mode 2	39
18	Ayrton	Zonda 3FX	Standaard	50
3	ROXX	Cluster B2 FC	DWE+	9
3	ROXX	Cluster C2	Simple	15
Floor set				
6	Robe	DL4X	Mode 1	35
6	Robe	LedBeam150	Mode 2	16
1	Pea Soup	Phantom	2 Channel	2
1	Swefog	Xeon II	2 Channel	2

SACN 193 Moving Frontlight

nr.	Brand	Type	Location	DMX	Mode
901	JB Lighting	P12 Profile	Front bridge down	193.1	Mode 2
902	JB Lighting	P12 Profile	Front bridge down	193.64	Mode 2
903	JB Lighting	P12 Profile	Front bridge down	193.127	Mode 2
904	JB Lighting	P12 Profile	Front bridge down	193.190	Mode 2
905	JB Lighting	P12 Profile	Front bridge down	193.253	Mode 2
906	JB Lighting	P12 Profile	Front bridge down	193.316	Mode 2
907	JB Lighting	P12 Profile	Front bridge down	193.379	Mode 2
908	JB Lighting	P12 Profile	Front bridge down	193.442	Mode 2

Front Plot

Down

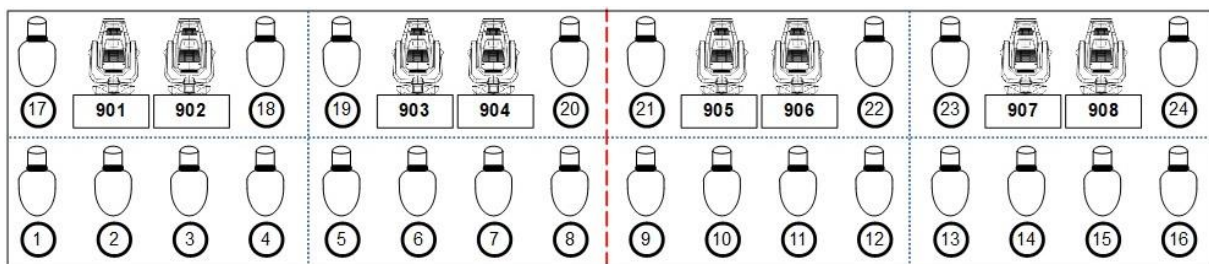

Up

SACN 191 House Dimmers

Selecon

Profile 1200w

Front bridge

Single Dim

SACN 191 House Light

1	Walk-in hall light / classic	House + stage	191.501	Single Dim	Full House
2	show hall light / classic	House	191.502	Single Dim	Full House
3	Hall light excl LED uplight	House	191.503	Single Dim	House
4	LED R	House	191.504	Single Dim	Uplight R
5	LED G	House	191.505	Single Dim	Uplight G
6	LED B	Stage	191.506	Single Dim	Uplight B

Stage light

LX0 – sACN 20

nr.	Brand	Type	Location	DMX	Mode
301	ROXX	Cluster B2 FC	LX 0	20.1	DWE+
302	ROXX	Cluster B2 FC	LX 0	20.10	DWE+
303	ROXX	Cluster B2 FC	LX 0	20.19	DWE+
401	ROXX	Cluster S2	LX 0	20.28	Simple

LX 1 – sACN 21

nr.	Brand	Type	Location	DMX	Mode
111	JB Lighting	P9	LX 1	21.1	Mode 2
112	JB Lighting	P9	LX 1	21.40	Mode 2
113	JB Lighting	P9	LX 1	21.79	Mode 2
114	JB Lighting	P9	LX 1	21.118	Mode 2
211	Ayrton	Zonda 3FX	LX 1	21.157	Standaard
212	Ayrton	Zonda 3FX	LX 1	21.207	Standaard
213	Ayrton	Zonda 3FX	LX 1	21.257	Standaard
214	Ayrton	Zonda 3FX	LX 1	21.307	Standaard
215	Ayrton	Zonda 3FX	LX 1	21.357	Standaard
216	Ayrton	Zonda 3FX	LX 1	21.407	Standaard

LX 2 – sACN 22

nr.	Brand	Type	Location	DMX	Mode
121	JB Lighting	P9	LX 2	22.1	Mode 2
122	JB Lighting	P9	LX 2	22.40	Mode 2
123	JB Lighting	P9	LX 2	22.79	Mode 2
124	JB Lighting	P9	LX 2	22.118	Mode 2
221	Ayrton	Zonda 3FX	LX 2	22.157	Standaard
222	Ayrton	Zonda 3FX	LX 2	22.207	Standaard
223	Ayrton	Zonda 3FX	LX 2	22.257	Standaard
224	Ayrton	Zonda 3FX	LX 2	22.307	Standaard
225	Ayrton	Zonda 3FX	LX 2	22.357	Standaard
226	Ayrton	Zonda 3FX	LX 2	22.407	Standaard

LX 3 – sACN 23

nr.	Brand	Type	Location	DMX	Mode
131	JB Lighting	P9	LX 3	23.1	Mode 2
132	JB Lighting	P9	LX 3	23.40	Mode 2
133	JB Lighting	P9	LX 3	23.79	Mode 2
134	JB Lighting	P9	LX 3	23.118	Mode 2
231	Ayrton	Zonda 3FX	LX 3	23.157	Standaard
232	Ayrton	Zonda 3FX	LX 3	23.207	Standaard
233	Ayrton	Zonda 3FX	LX 3	23.257	Standaard
234	Ayrton	Zonda 3FX	LX 3	23.307	Standaard
235	Ayrton	Zonda 3FX	LX 3	23.357	Standaard
236	Ayrton	Zonda 3FX	LX 3	23.407	Standaard
431	ROXX	Cluster S2	LX 3	23.457	Simple
432	ROXX	Cluster S2	LX 3	23.472	Simple

Floor set – sACN 31

On request we can build the floor set with your light technician at the day of the event.





Floor set – sACN 31


601	Robe	DL4X	Floor	31.1	Mode 1
602	Robe	DL4X	Floor	31.36	Mode 1
603	Robe	DL4X	Floor	31.71	Mode 1
604	Robe	DL4X	Floor	31.106	Mode 1
605	Robe	DL4X	Floor	31.141	Mode 1
606	Robe	DL4X	Floor	31.176	Mode 1
701	Robe	LedBeam150	Floor	31.211	Mode 2
702	Robe	LedBeam150	Floor	23.227	Mode 2
703	Robe	LedBeam150	Floor	31.243	Mode 2
704	Robe	LedBeam150	Floor	31.259	Mode 2
705	Robe	LedBeam150	Floor	31.275	Mode 2
706	Robe	LedBeam150	Floor	31.291	Mode 2
707	Robe	LedBeam150	Floor	31.307	Mode 2
708	Robe	LedBeam150	Floor	31.323	Mode 2
501	Pea Soup	Phantom	Floor	31.512	1 channel

Stage Plot

Top

Symbol key

-  Ayrton Zonda 3 FX (mode 2 - 50ch) (18x)
-  JB Lighting P9 (mode 2 - 39ch) (12x)
-  ROXX S2 Strobe (Simple mode - 15ch) (3x)
-  ROXX B2 FC Blinder (DWE+ 9ch) (3x)

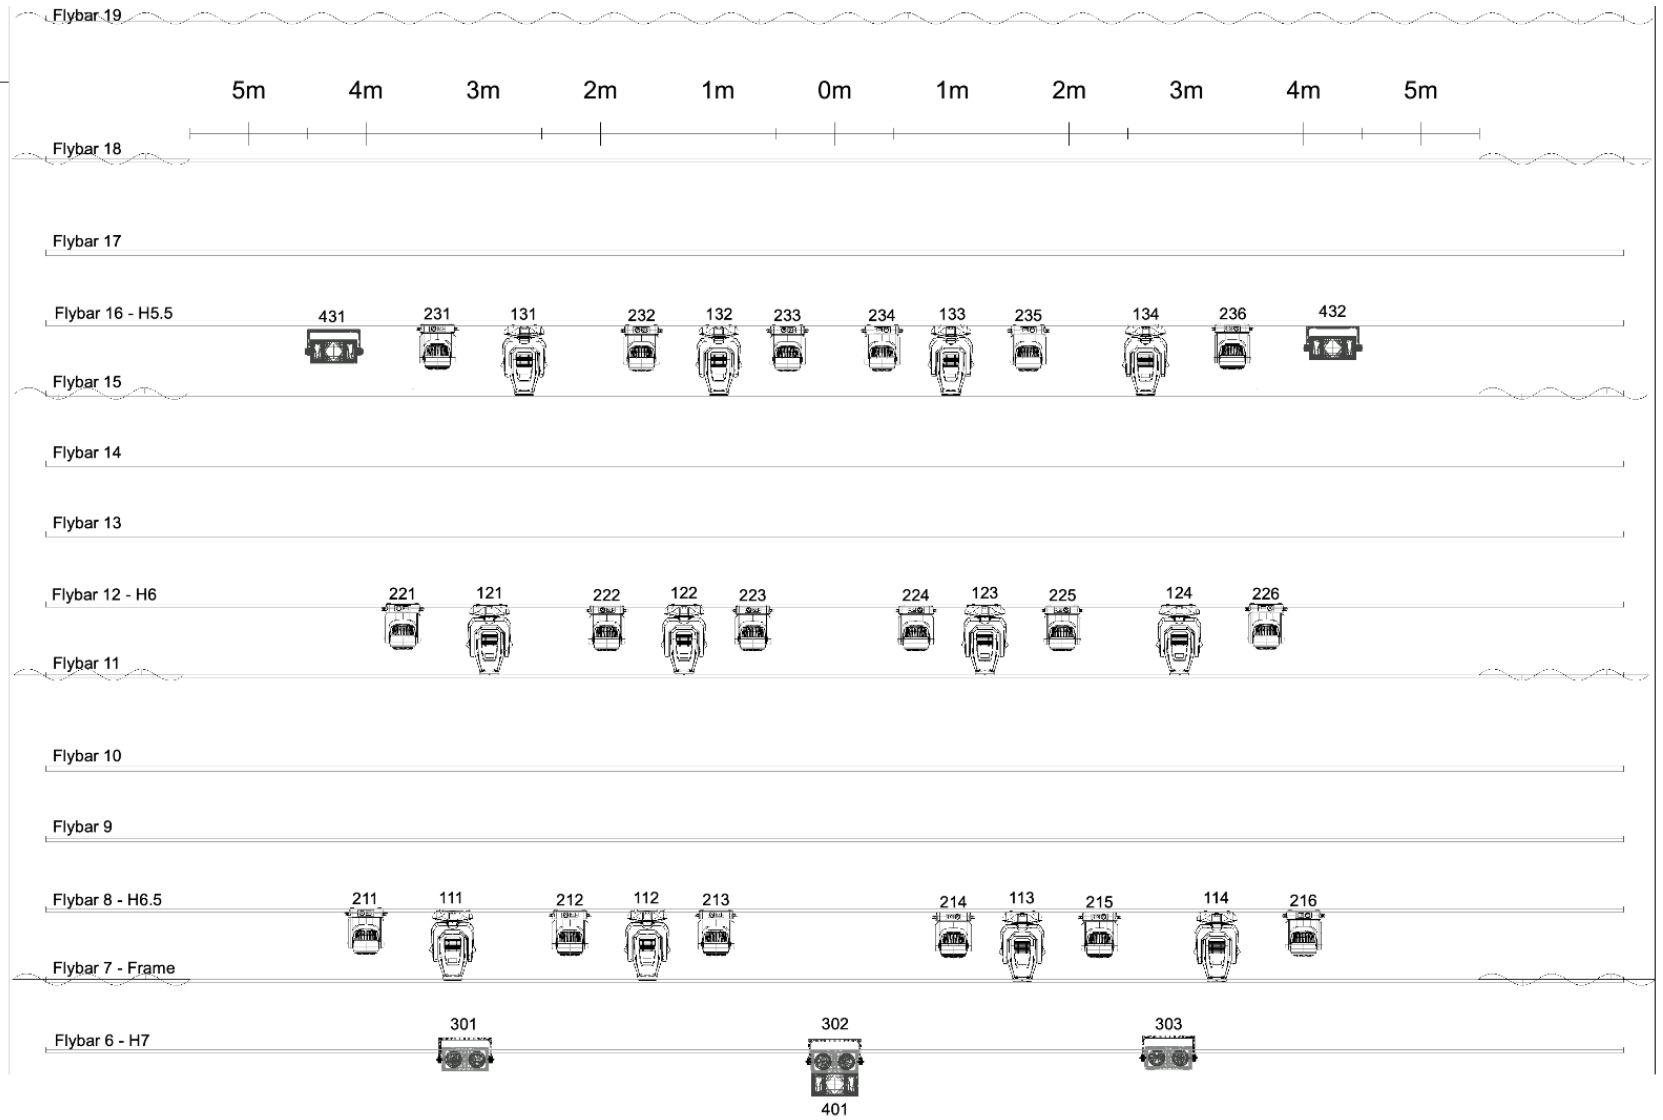

AUDIENCE

Flybar list

flybar #	distance from stage edge in m	Note	What?
1	-4,0	Hall flybar 13,9 m	
2	-0,6		
3	0	Flybar starts on stage edge	
4	0,6	Not the full length (9m)	
5	1,2	Flybar blocked by line array baffle	
6	1,8		LX 0 (H: 7,0 M)
7	2,4		Proscenium curtain
8	3		LX 1 (H: 6,5 M)
9	3,6		
10	4,2		Border
11	5		Legs
12	5,6		LX 2 (H: 6,0 M)
13	6,2		
14	6,8		Border
15	7,4		Legs
16	8		LX 3 (H: 5,5 M)
17	8,6		
18	9,4		Legs
19	10,6		Black backdrop
sidebar left	-7,6	length 10 m	Black Sidedrop
sidebar right	7,6	length 10 m	Black Sidedrop
stapotech flybars			
maximum load		300 kg	
point load between cables		100 kg	
load end of bar		30 kg	
flybar height		10,2 m	
flybar length		14,9 m	


House lights (separate)

If you like to use all of the house lights separate. Please patch the following:

sACN 191.502 together with:

sACN 192:

- **Uplights**
RGBW Par (65x)
- **Orgel**
ROXX TW+ (6ch direct) (6x)
- **Organist**
Colorsource Par 5ch (1x)
- **Orkest Top**
ROXX TW+ (6ch direct) (25x)
- **Orkest Front**
Colorsource Par 5ch (8x)
- **Koof**
RGB Strip (10x)

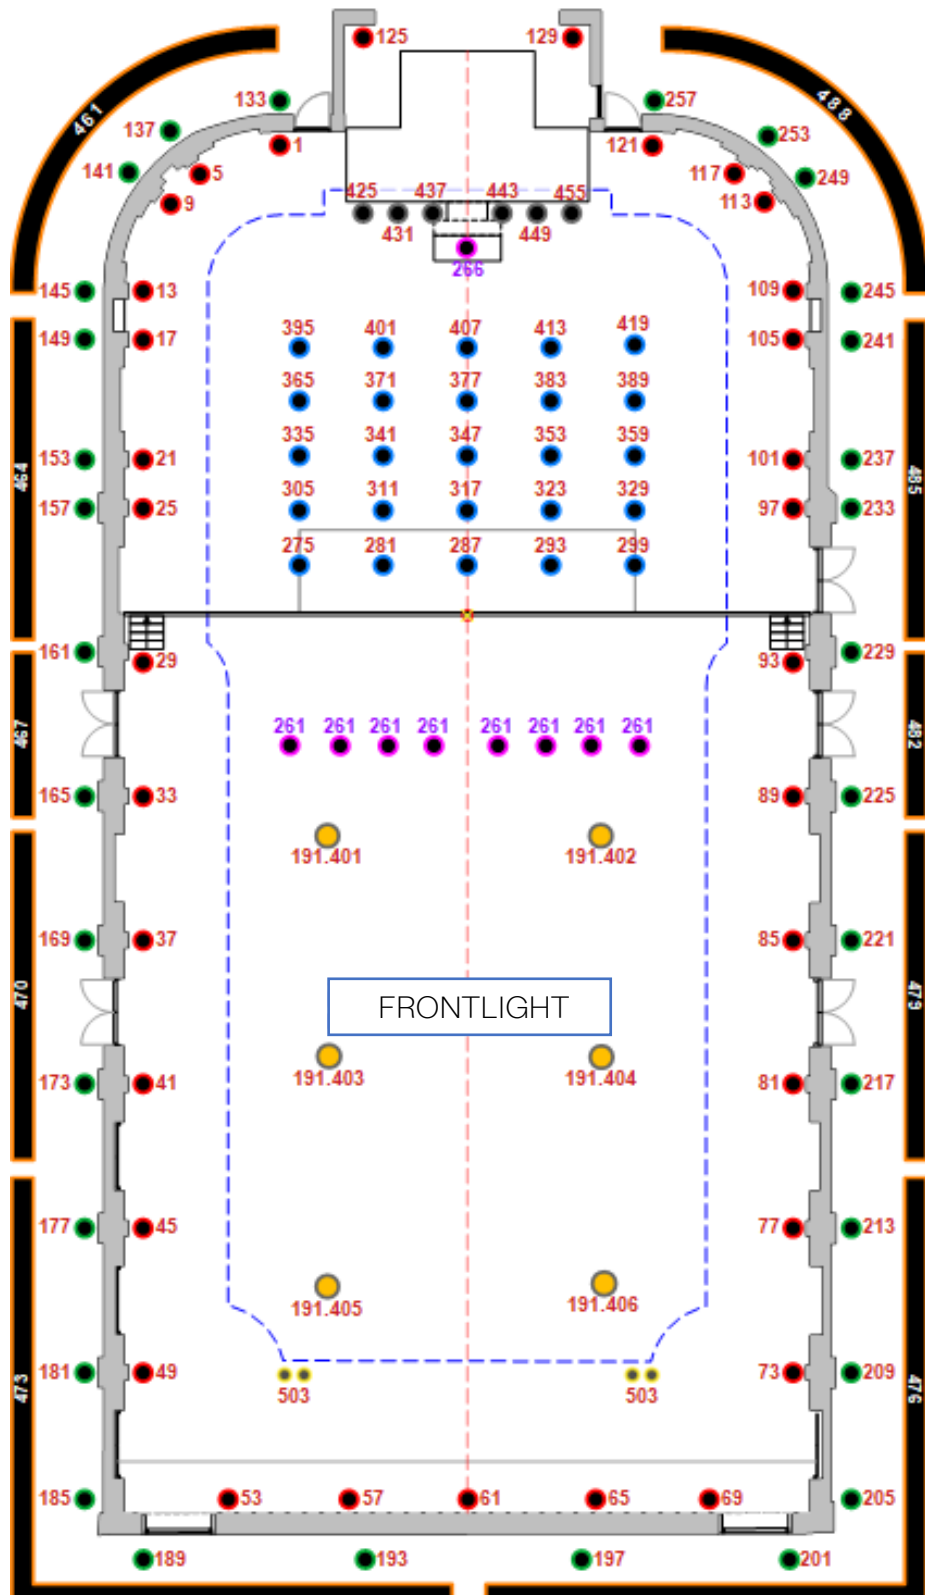

Impression gallery



JB LIGHTING P12

High CRI profile



JB LIGHTING P9

HP Stage spot



AYRTON ZONDA 3FX

Multi purpose beamwash



ROXX CLUSTER S2

High power flood light / stroboscope



ROXX CLUSTER B2 FC

High power multicolour Blinder



ROXX CLUSTER SET

In addition to the fixed set above,
we have some extra light available




Robe 150 beamwash

Multi purpose beamwash



Robe DL4X

480w RGBW led engine spot



Portman P1 mini LED

Multicolour LED eye-candy



Astera AX5

Battery powered LED par



ETC colorsource led par

Narrow beam LED par



ETC colorsource CYC

Multi purpose CYC / horizon

